

G-LENZ[®] SECURITY

4K

H.265 / A.I IP CAMERA

GUIP 39881

IP CAMERA BULLET - 8MP (4K)
A.I HUMAN TRACKING
FULL COLOR NIGHT COLOR
PoE - AUDIO



Feature:

Video Compression

H.264 / H.265 video compression, achieving ultra-low bit-rate, superb high-definition picture quality.

IR-CUT

Support IR-CUT, with ICR and automatic color change to achieve day/night function.

Digital Wide Dynamic

Support 2D/3D noise reduction digital wide dynamic.


Plug & Play

Plug and Play, support cloud technology easy to achieve network penetration and alarm information pushed.

Easy to Operate

Support OSD menu-do what you want and design your need. Support NVR/HVR, Support Onvif

ULTIMATE Series

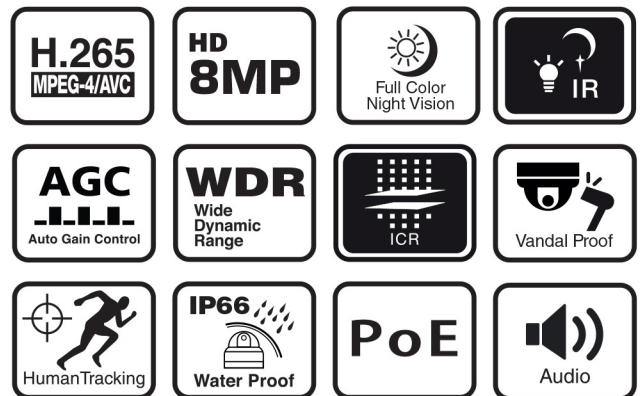

FREE APPS DOWNLOAD: P6SLITE



24/7 FULL-TIME
COLOR NIGHT VISION

Night Color

GUIP 39881



IP Camera
Bullet - 8MP(4K)
Night Color
PoE - Audio



G-LENZ®
SECURITY

TECHNICAL SPECIFICATIONS		
Model	GUIP 39881 IP CAMERA A.I OUTDOOR 8MP (4K) NIGHT COLOR	
Camera	Image Sensor	1/2.9" 8MP image sensor
	Resolution	8MP (4K)
	Effective Pixel	3840*2160
	TV System	PAL/ NTSC
	Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/25 1/10000Sec
	Scanning System	Progressive
	Video Output	Network
Function	D/N switch	Support D/N switching(IR-CUT optional)
	White Balance	Support auto white balance
	BLC	Support
	Noise Reduction	Support 3D NR
	WDR	Support D-WDR
	Motion Detection	Support
	Privacy Shelter	Support
	Mirror	Support
	OSD	Support OSD setting, drag the position freely
	Restart	Support
Lens	Focus Length	Board Lens 3.6mm
	Lens Focus Control	Fixed
	Lens Type	Fixed
Night Vision	IR Status	Support Smart IR, Full Color Night Vision
	IR Power On	Smart IR Auto Control
Intelligent Function	Human Detection	It supports human detection and can detect human shape for intelligent alarm.
	Voice Announcement	Support voice broadcast after human detection.
	Light Alarm	Support linkage light alarm when human form is detected.
Video	Compression	H.264 /H.265 /JPEG/AVI/MPEG
	Resolution	Main stream: 4K(3840*2160)/5MP(2880*1624)/4MP(2560*1440), 3MP(2304*1296), 2MP(1920*1080) Sub-stream 1: 720P(1280*720)/448P(800*448)/D1(704*576)/360P(640*360) Sub-stream 2: 360P(640*360) / CIF(352*288)
	Frame Rate	4K 15fps; 5MP 25fps, 4MP 25fps, 3MP 30fps
	Video Adjustment	Brightness, saturation, chroma, contrast and sharpness adjustment
	Network	Ethernet
Network	Protocol	ONVIF,P2P,CGI,HTTP,TCP/IP,IPv4,RTSP,UDP,NTP,DHCP,DNS,IP Filter
	Access Protocol	Support ONVIF/private protocol/CGI
	Max users	4
	Client	IOS, Android, Windows
	PoE	Support IEEE 802.3af
	P2P	Support QR Code
	Browser	IE8-11, Google Chrome, Firefox, Safari, Mac Safari
Audio	Audio	G.711U, G711A
	Input	1CH in
	Output	1Ch out
General Specifications	Housing	IP65
	IR Cut Filter	Support
	Operation Temperature	-20°C ~ +60°C RH95% Max
	Storage Temperature	-20°C ~ +60°C RH95% Max
	Power Source	DC 12V 2A
	Dimension	157(W) x 70(H) x 66(D) mm
	Weight	650g