



A.I
Humanoid
Detection

4MP

H.265 / A.I
SMART WIFI PAN/TILT CAMERA

GWIP-2000(VC)

SMART WIFI CAMERA
TWO WAY AUDIO
ON-DEVICE PET DETECTION
A.I HUMANOID DETECTION

PAN ROTATION
355°
TILT ROTATION
90°



Tab-to-Call-Button

Feature:

Video Compression

H.264 / H.265 video compression, achieving ultra-low bit-rate, superb high-definition picture quality.

AI Smart Function

Intelligent push, pet detection, humanoid detection, humanoid tracking, privacy masking

IR Night Vision


IRCUT double filter automatically switches, 6 infrared lights (850nm wavelength), irradiation distance: 7 meters

Alarm Notification

Alarm trigger, alarm sound warning. Mobile app alarm notification.

Tab-to-Call-Button

Support one-button remote call, expandable multiple call modes

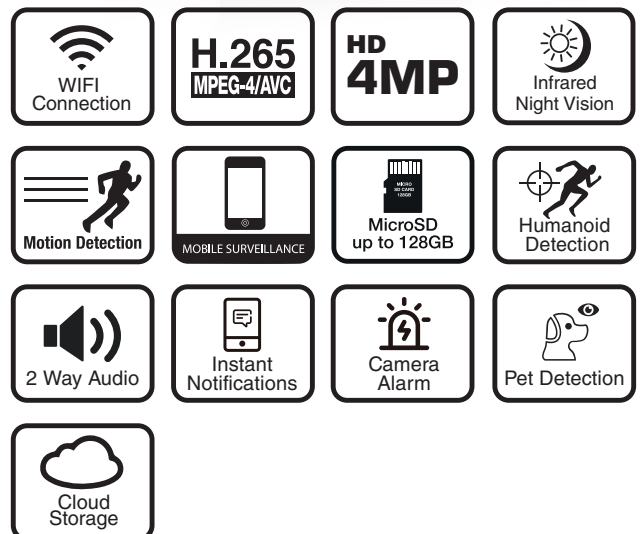

FREE APP DOWNLOAD: VICOHOME





GWIP-2000(VC)

Smart Pan/Tilt Camera

WiFi Connection

Two-Way Audio

Tab-to-Call-Button



G-LENZ®
SECURITY

TECHNICAL SPECIFICATIONS		
Model	GWIP-2000 Smart WiFi Camera with Tab-to-Call-Button 4MP (2K)	
System	SOC	Embedded LINUX operating system
Image Sensor	Sensor	1/3" color CMOS sensor
	Lens	4mm, F2.0, 4MP
	Viewing angle	Diagonal: 91.8°, Horizontal: 78°, Vertical: 38°
	Minimum illumination	0.01Lux
Audio	Input Output	Can realize two-way voice intercom (built-in microphone and speaker)
	Audio compression method	AAC
Video	Video compression method	H.264/H.265
	Lighting frequency	50Hz, 60Hz
	Image frame rate	15fps
	Maximum Image Resolution	2304*1296(2K)
	Night vision light source	IR-CUT double filter automatically switches, 6 infrared lights (850nm wavelength), irradiation distance: 7 meters
Network	Wi-Fi	2.4G Wi-Fi (IEEE802.11b/g/n), built-in antenna
	Supporting agreement	TCP/IP, UDP/IP, DHCP
	Support IP address	Dynamic IP address
AI	Smart function	Intelligent push, pet detection, humanoid detection, humanoid tracking, privacy masking
Alarm method	Alarm notification	Mobile APP message push, alarm sound warning.
Wake	Wake up method	PIR induction wake-up, remote active wake-up
Video	Video mode	Alarm trigger, manual recording
	Video storage	Cloud storage, local Micro SD card, phone memory
Interface	Power supply	Type C interface
	SD card	Up to 128GB supported
	Button	1 function key
Other	PTZ rotation angle	Horizontal 0~355 degrees, vertical -20~90 degrees
Environment	Working environment	-10° ~ 45°C /0% ~ 80% (no condensation)
	Storage environment	-20°C ~ 60° /0% ~ 90% (no condensation)
Environment	Working environment	-10° ~ 45°C /10% ~ 80% (no condensation)
	Storage environment	-20°C ~ 60° /0% ~ 90% (no condensation)