

G-LENZ[®] SECURITY

H.265 / A.I

SMART CAMERA 4G PTZ OUTDOOR

Connect Via
4G

2MP

GWIP-2300

4G SIMCARD NETWORK
WIRELESS CONNECTION
DUAL LIGHT FLASH ALARM
MULTIPLE AREAS ATTACH ALARM



Flash
Alarm

PAN ROTATION
355°
TILT ROTATION
90°



MULTIPLE AREAS ATTACH ALARM

Feature:

Video Compression

H.264 / H.265 video compression, achieving ultra-low bit-rate, superb high-definition picture quality.

AI Smart Function

Supporting AI automatic human shape detection with high sensitivity. Support vehicle detection, pet capture and package

Flash Alarm


Dual light red-blue flash alarm. Mobile APP alarm push alarm.

IR Night Color Vision

Infrared light(night vision distance of 7 meters), day and night 24-hour monitoring, IR-CUT switching, daytime color, night vision more clear

4G Simcard Wireless Connection

Easy and simple using direct 4G Simcard, support telkomsel & south east asia bands.

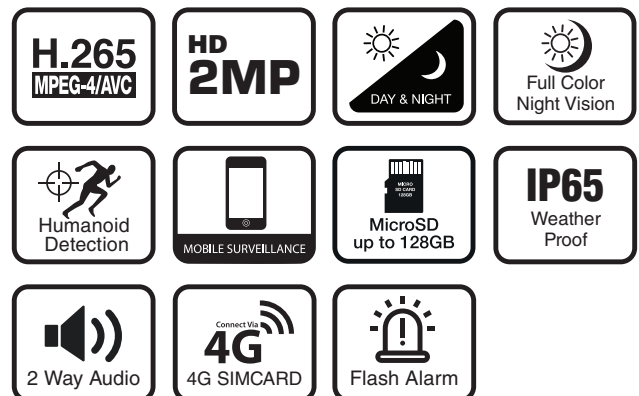

FREE APP DOWNLOAD: P6SLITE



24/7 FULL-TIME
COLOR NIGHT VISION

**Night
Color**



GWIP-2300 4G

Smart PTZ Camera Outdoor
Wireless 4G Connection
Two-Way Audio
Humanoid Detection



G-LENZ®
SECURITY

TECHNICAL SPECIFICATIONS		
Model	GWIP-2300 Smart Camera Outdoor PTZ 4G Connection - Flash Alarm	
Master processor	SOC	ARM
Image Sensor	Sensor	1/3" color CMOS sensor
	Lens	M12, f: 4mm, F2.3, 3-megapixel
	Visual angle	H (horizontal) 67 degrees; V (vertical) 50 degrees; D (diagonal) 88 degrees
	Minimum illumination	0.01Lux
Audio	Input/Output	Two-way voice intercom available (built-in Microphone and speaker)
	Audio compression method	AAC
Video	Video compression method	H.264/H.265
	Lighting frequency	50Hz, 60Hz
	Image frame rate	15fps
	Maximum Image Resolution	1920*1080P
	Light Source for Night Vision	IRCUT double filter automatic switching, 12 infrared lamps (850nm wavelength), irradiation distance:5 meters
Network	Wireless Network	2.4G Wi-Fi (IEEE802.11b/g/n), built-in antenna
	Protocols Supported	TCP/IP, UDP/IP, DHCP, RTMP, MUTP
	IP Address Supported	Dynamic IP address supported
Alarm	Alarm detection	Motion Detection
	Alarm linkage	Motion detection alarm, humanoid detection alarm, sound and light alarm, alarm video, snapshot
	Alarm notification	Alarm push by mobile APP
AI	Intelligent function	Intelligent push, Humanoid detection, vehicle detection, package detection, pet capture, activity zone
PTZ	PTZ rotation angle	H (horizontal) 0° ~ 355°; V (vertical) -20° ~ 90°
Interfaces	Power Supply	1 Micro USB interface, DC 5V/1A
	SD card	1 Micro SD card (up to 128GB)
	Keys	1 function key
Other	Adjustable lens	Not adjustable
	LED indication	Monochrome white light (power/network signal/function indicator)
	Video storage method	Micro SD card (up to 128GB) local storage, cloud storage
	Install method	Ceiling or wall hanging
Environment	Dustproof and waterproof	no
	Operating environment	-10° ~ 45°C /10% ~ 80% (no condensation)
	Storage environment	-20°C ~ 60° /0% ~ 90% (no condensation)
Color	Appearance color	White
	Net Weight of Bare Machine	Approx. 626g
Certifications	Certificate	CE, FCC, RoHS